




DAS SÄGEBAND.

EVOTEC SCL GT[®]

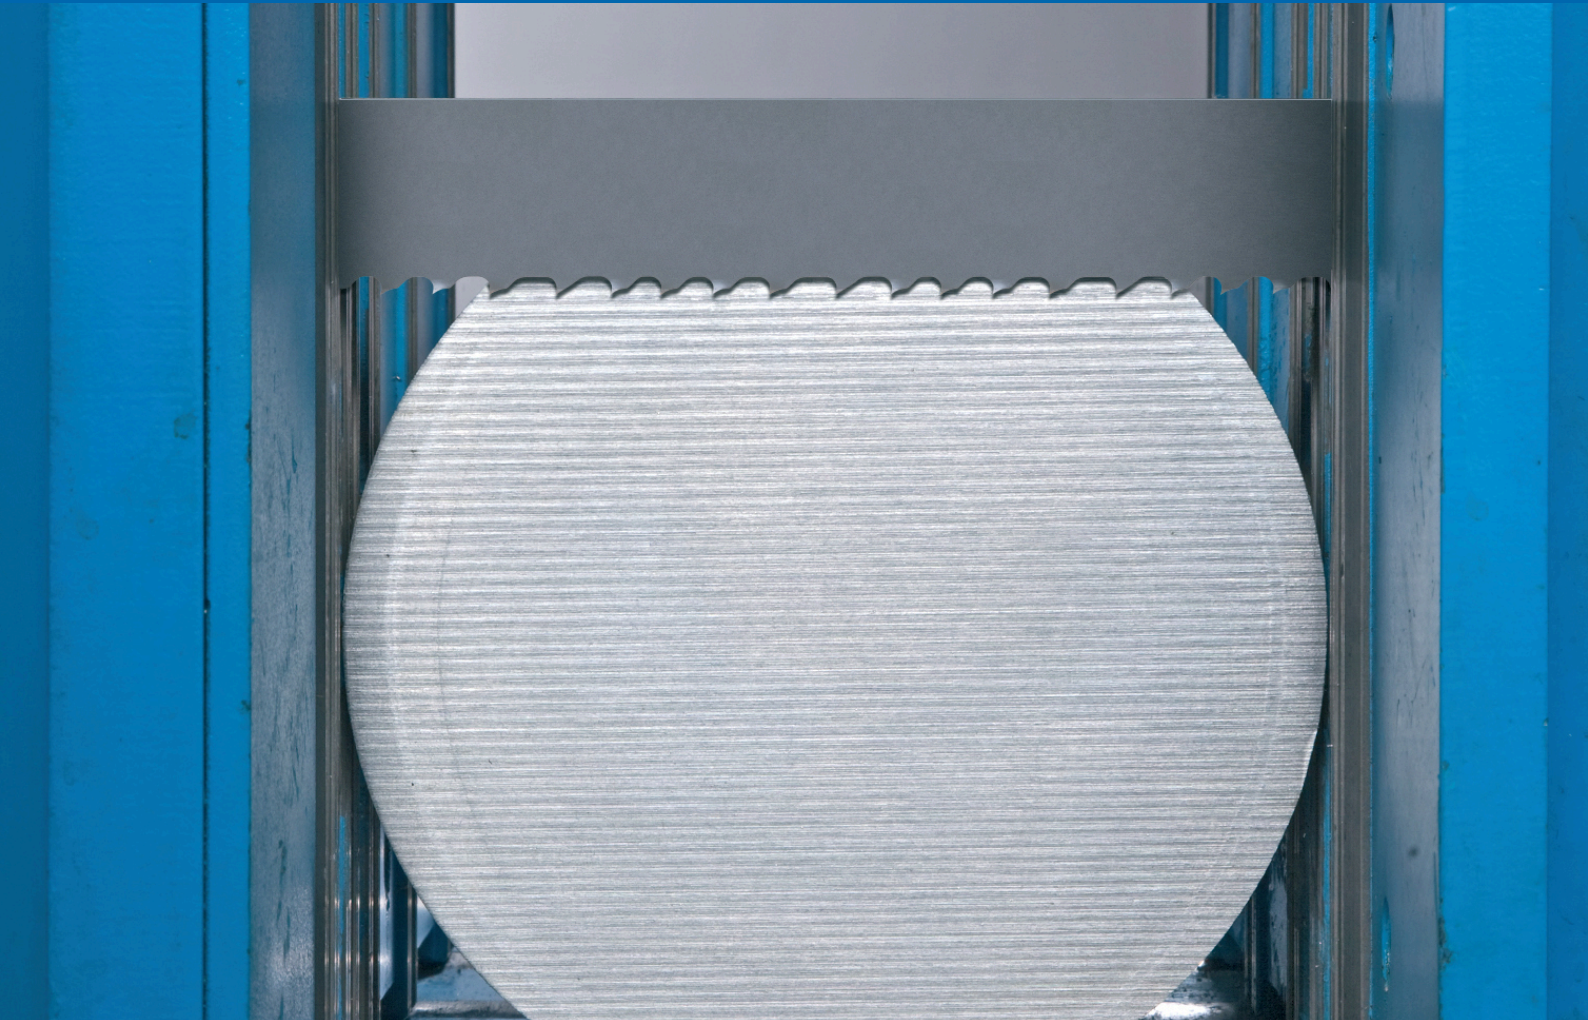

BI-METAL BANDSAW BLADE

The optimal blade for solid materials
(surface quality)

WWW.WESPA-SAW.COM



EVOTEC SCL GT[®]


The optimal blade for solid materials (surface quality)



Product group 467					
mm	Inch / tpi	2/3	1,4/2	1,1/1,4	0,7/0,9
41 x 1,30	1 1/2" x 0,050	■	■		
54 x 1,60	2" x 0,062		■	■	
67 x 1,60	2 5/8 x 0,062		■	■	■
80 x 1,60	3 1/8" x 0,062			■	■
Contact lengths in mm		130-400	220-600	400-800	800-2100

Extremely stressable high-performance bandsaw blade for sawing difficult to cut materials as well as highly heat-resistant special alloys.

The optimum chip distribution enables very high metal removal rates without cutting run with good running smoothness. The ground teeth minimize chipping at the cutting edge of the teeth and extend tool life. Precise cutting channel provides optimum surface finishes and saves additional costs of re-machining.

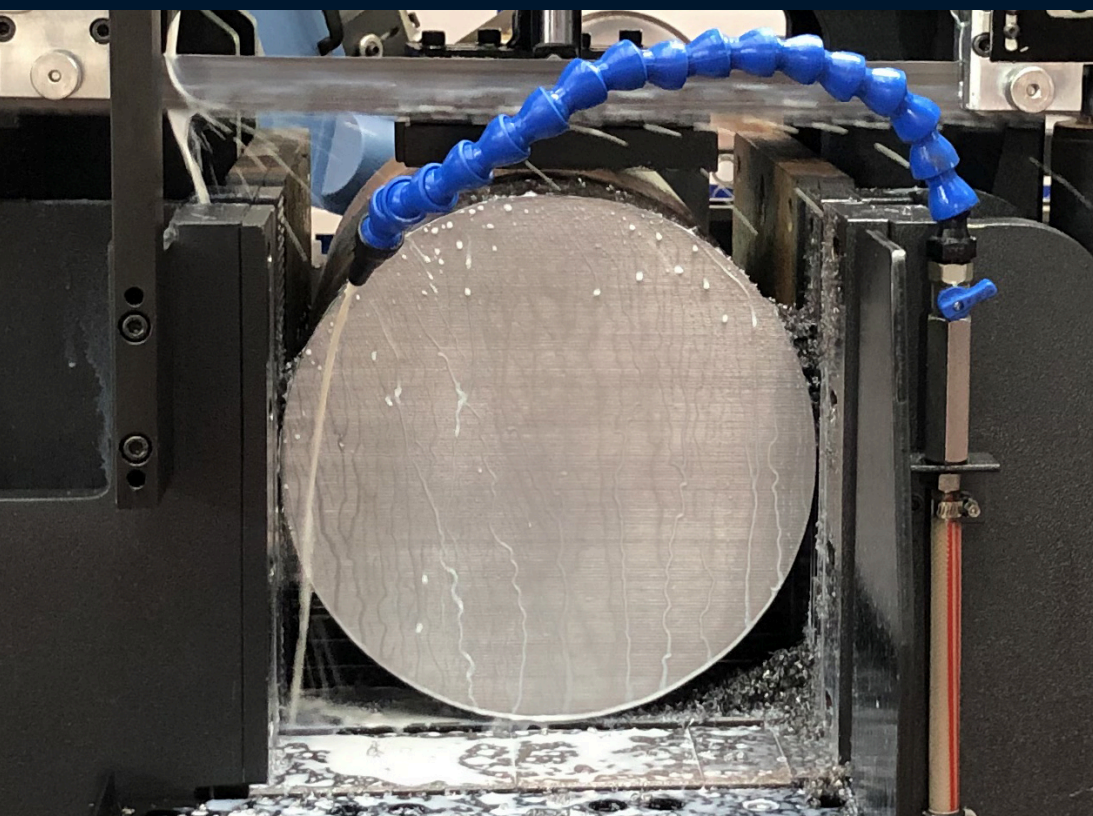

Bi-Metal

Product Features



Reinforced Profile Tooth
positive rake angle

M51

Areas of Application



Solid Material
large



Solid Material
small



Bundle
solid material

Product Advantages



Surface Finish



Performance



Precision

MATERIAL GROUP

2

Stainless steel
Hardened steels
Heat resistant steel
Steel and non-ferrous alloys
Titanium and Titanium alloys